

Drainsafe™...Your Circle Of Safety

Minimize Your Pool or Spa Entrapment Hazards with the Drainsafe™ DS 360 Family of Products


Drainsafe™ DS 360 & DS 360 M

- DS360 will retrofit 5 1/2" - 8" dia. sumps (Actual Cover 11" dia.)
- Universal fastener kit and security tool included in both models
- Both DS 360 & DS 360 M are pool cleaner friendly
- Either model works on dual drain as well as single suction outlets
- Certified Safe flow of 123 G.P.M.
- ASME/ANSI A112.19.8 2007 Standard Compliant
- Able to be installed on a Vertical or Horizontal plane
- 27 sq. in. open surface area minimizes potential "Differential Hold Down Forces" of dual drain systems
- DS 360 M works on 5 1/2" - 8" dia. sumps as well as retrofit smaller 5" sumps utilizing additional knockouts (Actual Cover 10 3/8" dia.)



Drainsafe™ DS 360 X (9x9 Kit)

- Complies with the ASME/ANSI A112.19.8 2007 Standard and The 2007 Federal Pool & Spa Safety Act
- Includes orange head safety screws for visual inspections
- Minimizes potential "Differential Hold Down Forces" of dual drain systems
- Certified safe flow rate of 160 G.P.M.
- Works on dual drain as well as single suction outlets - **FLOOR MOUNT ONLY!!**
- Industry established PVC construction - **SOLD AS A COMPLETE KIT ONLY!!**

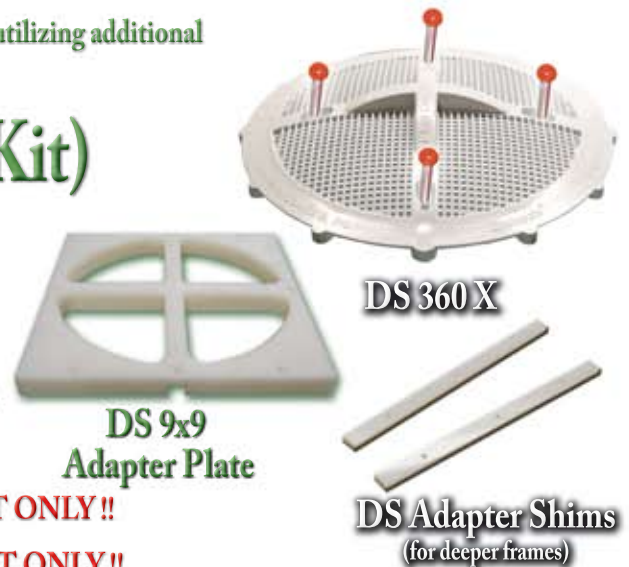

DS Mud Ring (or optional DS Adapter Ring)

- Constructed of Rigid PVC Material & Chamfered (beveled) for smooth Hydraulic Flow (for use with DS 360 or DS 360 M Covers Only)
- Optional Adapter Ring attaches to existing sumps with 7 5/8" bolt pattern using provided stainless steel screws



NEVER LEAVE A CHILD ALONE BY WATER, ANY WATER!